1980 XS1100G Wiring Diagram

WIRE HARNESS ASS'Y 3H5-82590-50-00 Rev. B

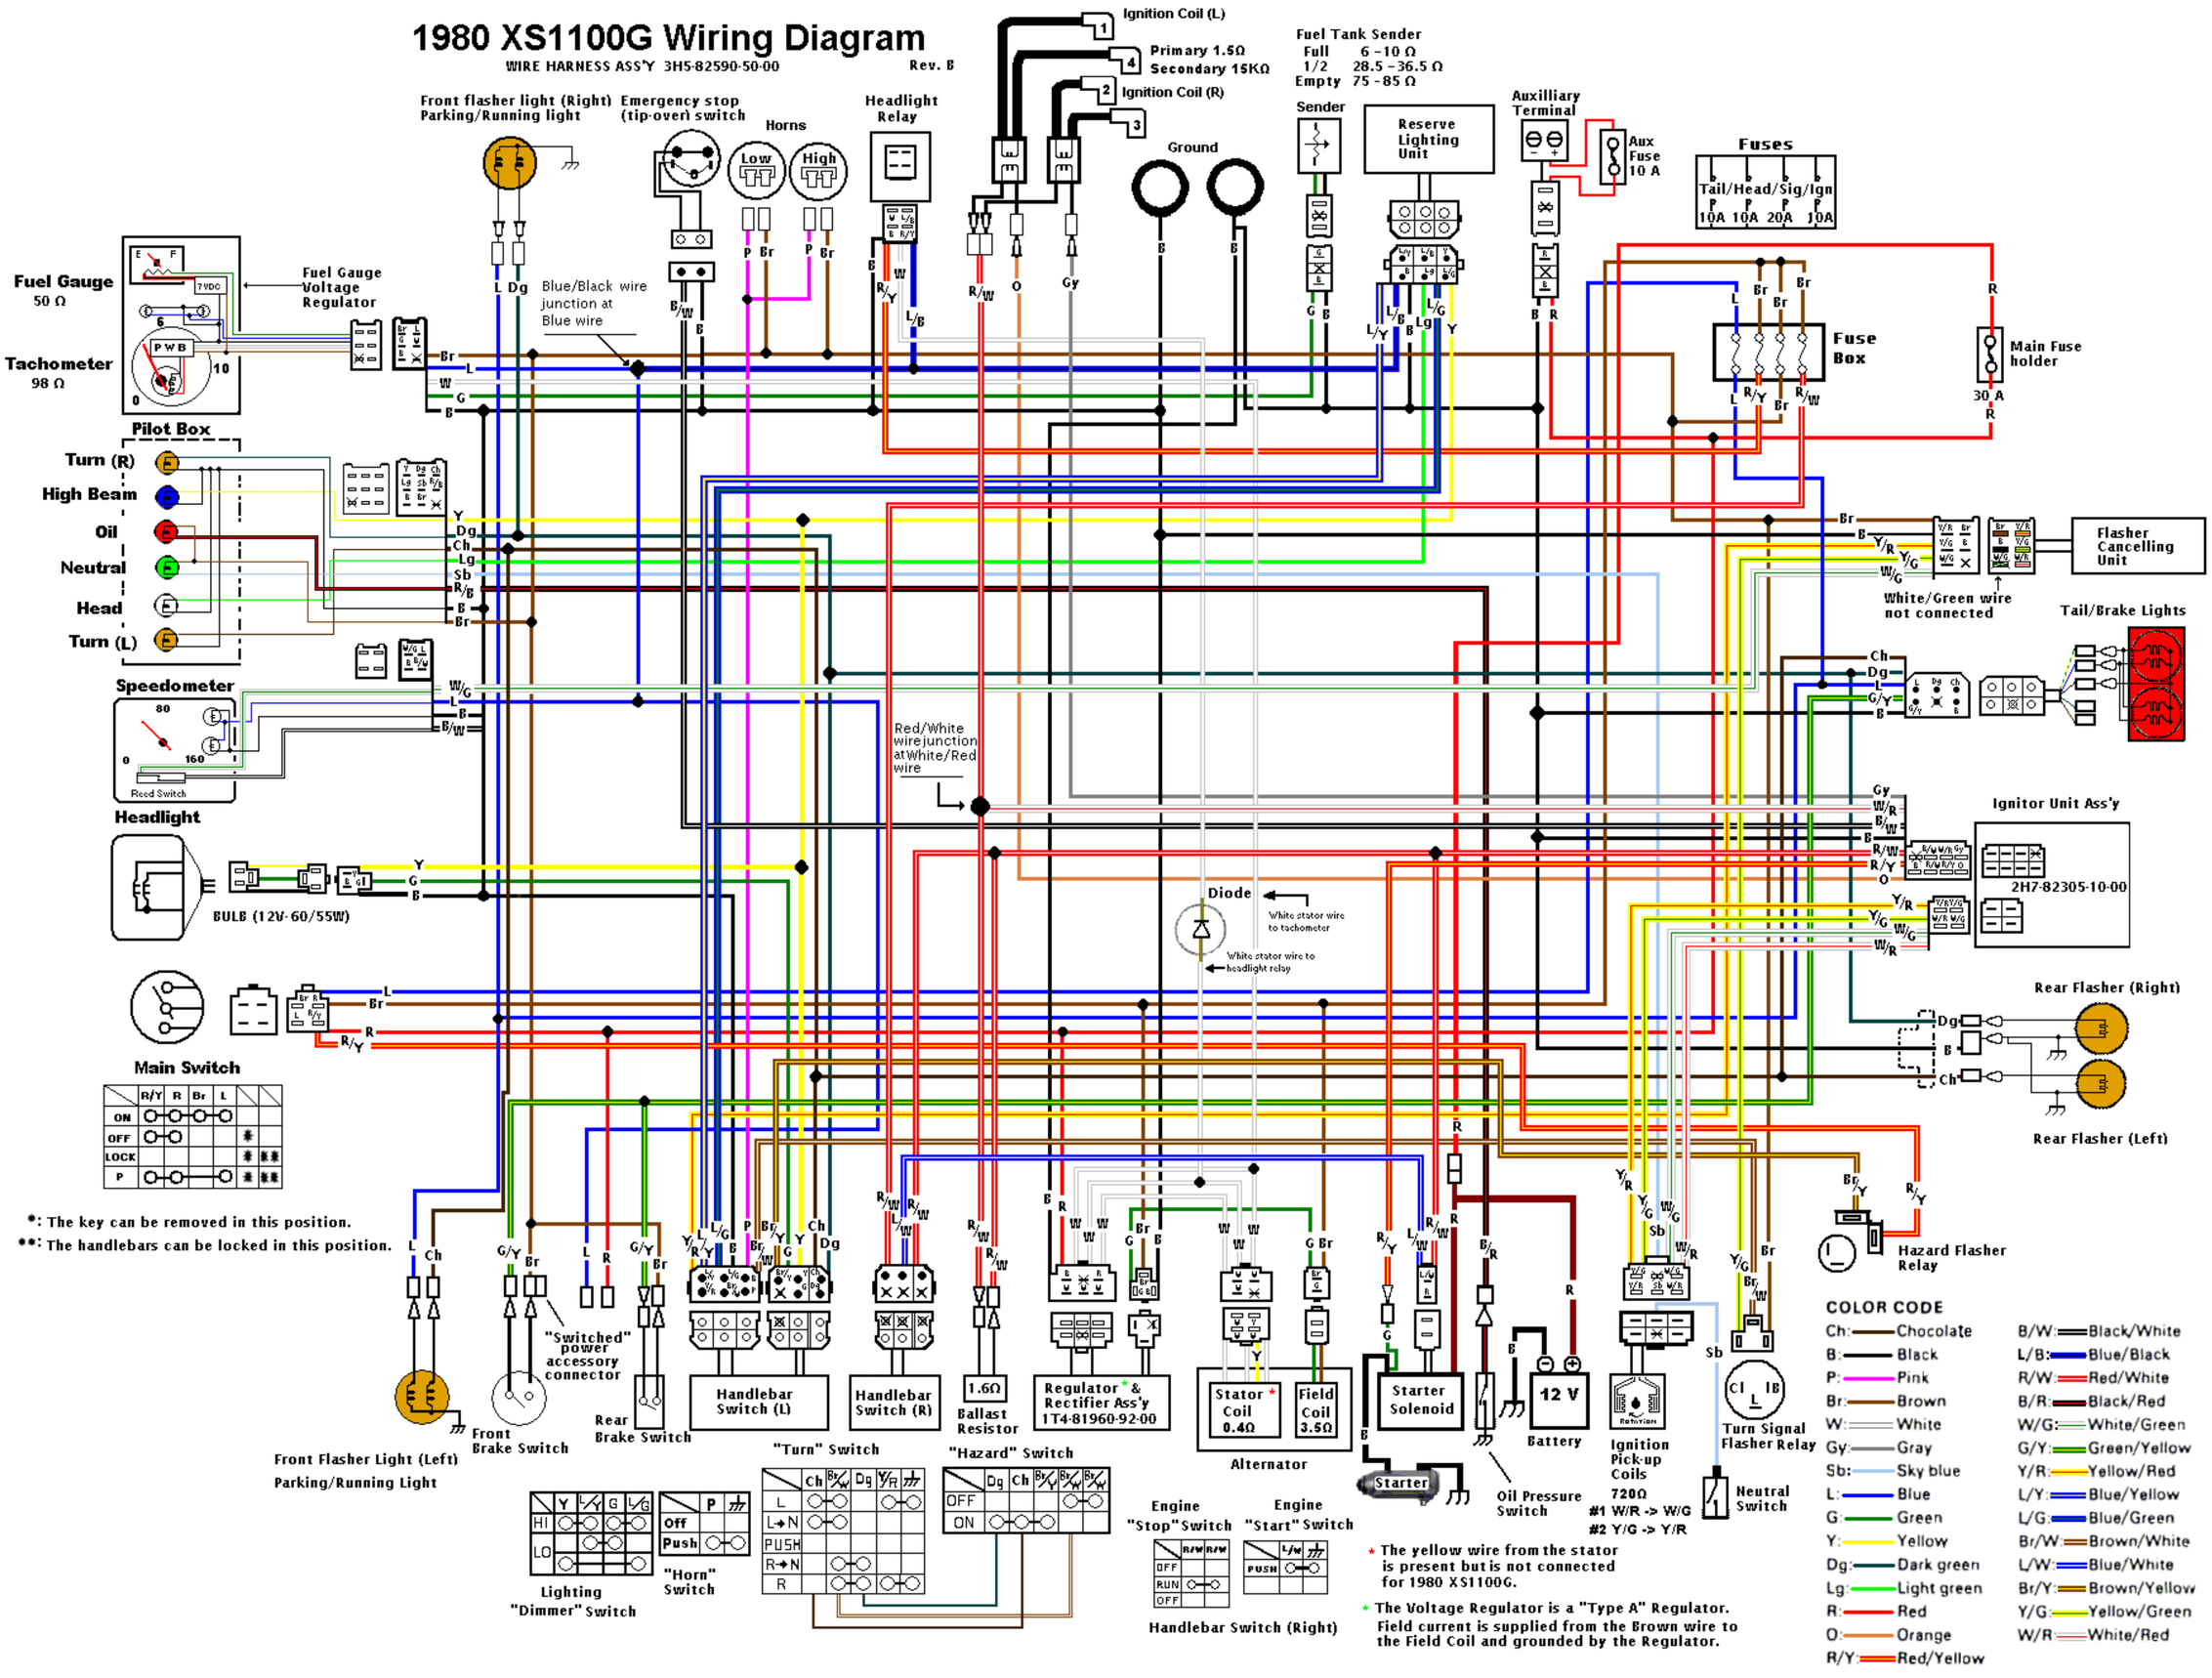

*: The key can be removed in this position.

**: The handlebars can be locked in this position.

* The yellow wire from the stator is present but is not connected for 1980 XS1100G.

* The Voltage Regulator is a "Type A" Regulator. Field current is supplied from the Brown wire to the Field Coil and grounded by the Regulator.

COLOR CODE

Ch:	Chocolate	B/W:	Black/White
B:	Black	L/B:	Blue/Black
P:	Pink	R/W:	Red/White
Br:	Brown	B/R:	Black/Red
W:	White	W/G:	White/Green
Gy:	Gray	G/Y:	Green/Yellow
Sb:	Sky blue	Y/R:	Yellow/Red
L:	Blue	L/Y:	Blue/Yellow
G:	Green	L/G:	Blue/Green
Y:	Yellow	Br/W:	Brown/White
Dg:	Dark green	L/W:	Blue/White
Lg:	Light green	Br/Y:	Brown/Yellow
R:	Red	Y/G:	Yellow/Green
O:	Orange	W/R:	White/Red
R/Y:	Red/Yellow		